

# EVBox Elvi

home charging solution



From 7.4 to 22 kW

Tracks and invoices charging sessions



Easy to use, install, and upgrade with modular, click-on features

Compatible with every electric car—now and in the future

Best suited for residential use

at houses and multi-unit dwellings

Dimensions in mm

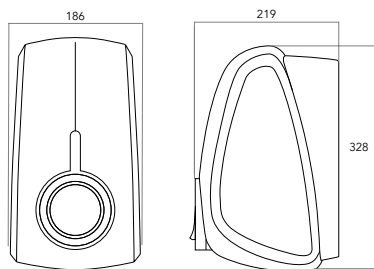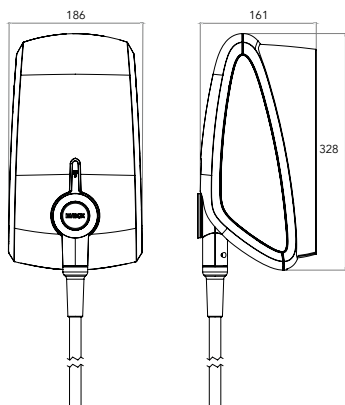

## Electrical properties

<b>Charging capacity</b>	Upgradable 7.4 –22 kW
<b>Charge mode</b>	Mode 3 (IEC 61851-1)
<b>Number of connectors</b>	1
<b>Connector options</b>	Fixed cable or Type 2 socket
<b>Fixed cable type</b>	Type 1 (SAE J1772) or Type 2 (IEC 62196-2) plug
<b>Fixed cable length</b>	6 m (18 ft)
<b>Connection capacity</b>	Selectable 1-phase or 3-phase, 230–400V, 16 A and 32 A, 50-60 Hz 12 VDC
<b>Secondary power circuit</b>	
<b>Relays</b>	2 x 35 A, 2 P, 12 V coil current
<b>Metering</b>	Optional 3-phase S-Bus MID-certified kWh meter in wall dock

## Safety and certification

<b>Ground fault detection</b>	6 mA DC CCID
<b>Housing fire ratings</b>	UL94 V-0, US-FMVS5 / ISO 3795 passed, DIN 53438 F1/K1
<b>Storage temperature</b>	-25°C to +60°C (-13°F to +140°F)
<b>Operating temperature</b>	-25°C to +45°C (-13°F to +113°F)
<b>Operating humidity</b>	Max. 95% non-condensing
<b>Enclosure ratings</b>	IP55, IK10 (IEC 60529)
<b>CE certified</b>	Yes
<b>Compliance</b>	IEC 61851-1, IEC 61851-21-2, CE EMC EU/2014/30, CE Low voltage EU/2014/35, RED EU/2014/53

## Connectivity & Installation

<b>Authorization</b>	Autostart / Keyfob / RFID card - controller with RFID reader type Mifare 13.56 MHz
<b>Status indication / HMI</b>	LED ring
<b>WLAN communication</b>	Wi-Fi 2.4/5 GHz (IEEE 802.11 a/b/g, IEEE 802.11 d/e/i/h) / Bluetooth 4.0
<b>Cellular communication</b>	3G / UMTS (EU/US/JPN) option
<b>External serial communication</b>	RS485 interface for local dynamic load balancing, solar integration, and scheduled charging. This interface enables the use of EVBox Smart Charging.
<b>Charging protocol</b>	OCPP 1.5 S, 1.6 J
<b>Positioning</b>	GPS / Wi-Fi
<b>Maximum installation height</b>	+2000 m (6560 ft) above sea level

## Physical properties

<b>Housing</b>	Polycarbonate
<b>Dimensions (WxHxD)</b>	Fixed cable - 186 x 328 x 161 mm (7 x 13 x 6 in) With socket - 186 x 328 x 219 mm (7 x 13 x 8 in)
<b>Weight</b>	3 kg (6.6 lbs) - 3-phase, 32 A station with socket 6 kg (13.2 lbs) - 1-phase, 16 A station with 6 m (20 ft) fixed cable 11 kg (24.2 lbs) - 3-phase, 32 A station with 6 m (20 ft) fixed cable
<b>Mounting</b>	Wall or pole
<b>Standard colors</b>	Misty Black, Polar White

## Note:

EVBox Elvi charging stations can charge at 32 A; however, actual charging capacity is dependent on local environmental conditions and internal temperature build up.

Copyright © 2020 EVBox Manufacturing B.V. Elvi®, EVBox® and the EVBox logo are registered trademarks. All rights reserved. EVBox has compiled this document to the best of its knowledge but does not warrant that all information provided is error-free; EVBox does not accept liability in that respect. All specifications are approximates only. The limited warranty conditions are stated in the applicable EVBox general terms and conditions. EVBPI\_ELVI\_EN\_082019 © EVBox Manufacturing B.V.